
TOSOT

Submittal Data: TM09H	FDI	9,000 BTU		
Job Name		Location	Date	
Purchaser		Engineer	Dute	
Submitted To		-	Reference	Approval Construction
Unit Designation		Schedule No.		
GENERAL FEATURES				
-Quiet Operation -Multi-Speed Fan				
-Medium Static Pressure Capability		10 million		
-Slim Line Construction 8" high			: : :	
-Internal Condensate Drain Pump				
-Flexible Return Air From Bottom Or Rear				
-XK-19 Wired Controllers				
-Wireless Remote Controllers				
-Sentry Condensate Overflow Protection				
-Limited 5 yr. Parts Warranty				
System Ratir		Units Specifica	tion & Data	
Cooling*				
Rated Capacity	8,500 BTU/H			
		Wired Controller		XK-19
Heating*				
Rated Capacity	9,500 BTU/H			
Sound Pressure (Hi/Lo)**		Condensate Drain I	lift (Height)	18-in
Cooling	37/31 dbA			457-mm
Heating	37/31 dbA			107 1111
		Drain Size (OD)		1.0-in
Air Flow (min/max)				26-mm
Indoor Fan	147/265 CFM			
Ext Static Pressure (max/min)	0.040/0.025 inch wg			
Electrical Rati		Refrigerant P	ining Data	
			Reingerunt i	
Fan Motor		Refrigerant Type		R410A
Output Power	80 W			
FLA	0.35 A	Gas Pipe Size (O	D)	3/8-in
Dawar Sumalu				
Power Supply	200/220 V 1 Dhara (0 11-	Liquid Pipe Size ((UD)	1/4-in
Normal Operational Voltage Voltage Range	208/230 V, 1 Phase, 60 Hz 187 - 253 V	Connection Metho	od	Flared
MCA	107 - 253 V 1.0 A		u	ridieu
Interconnecting Cable Wire Size	14-4 AWG			
		* Test conditions are	based on AHRI 210/	/240.
		**Sound Power rating		
PATION.	AUDI			
		ww.abridirectory.org		KING

DIMENSIONAL SPECIFICATIONS

TM09HFDI

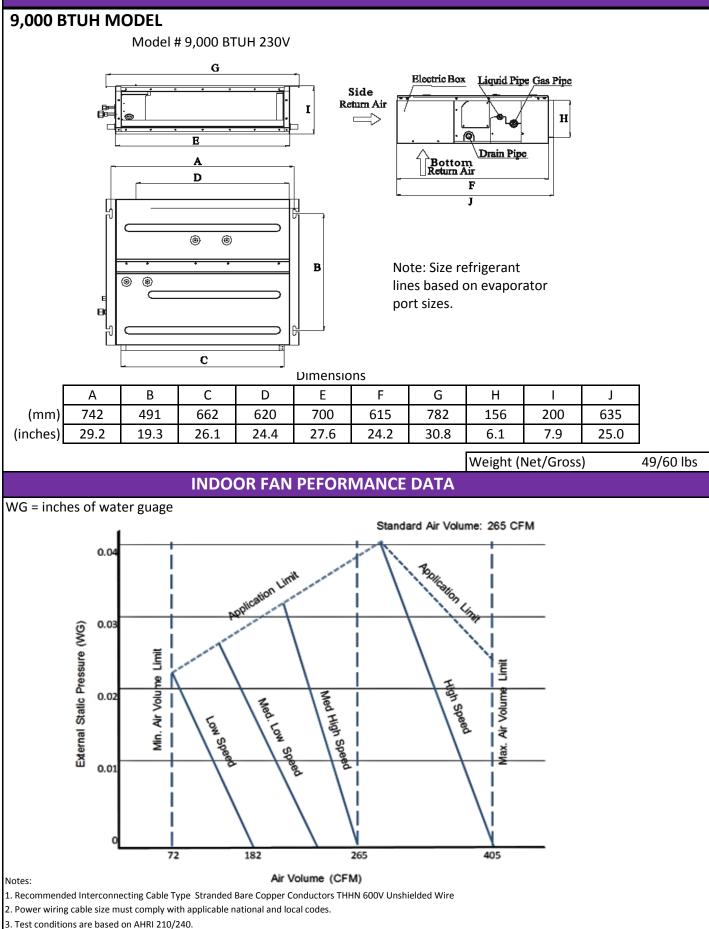

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.