




TQSDT

MULTI-ZONE

Wall Mounted Indoor Unit

Model:
TWH18ATDXD-D3DNA3AI

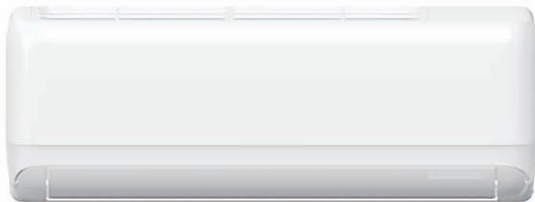

Model		TWH18ATDXD-D3DNA3AI	
Power Supply	Rated Voltage	V~	208/230
	Rated Frequency	Hz	60
	Phases	-	1
Power Supply Mode		-	Outdoor
Cooling Capacity		Btu/h	17600
Heating Capacity		Btu/h	19100
Cooling Power Input		W	1750
Heating Power Input		W	1750
Cooling Current		A	7.95
Heating Current		A	7.95
Rated Input		W	2300
Rated Current		A	9.5
EER		(Btu/h)/W	10.05
COP		(Btu/h)/W	10.90
SEER		-	17.5(SEER) 17.5(SEER2)
HSPF		-	9(HSPF) 8.5(HSPF2)
Air Flow Volume		CFM	618/512/471/436/395/336/283
Dehumidifying Volume		Pint/d	3.8
Application Area		yd ²	28-41
Indoor Unit Model		TWH18ATDXD-D3DNA3AI	
Indoor Unit	Fan Type	-	Cross-flow
	Fan Diameter Length(D × L)	mm	Φ106 × 706
	Cooling Speed	r/min	1350/1200/1120/1050/980/860/750
	Heating Speed	r/min	1350/1200/1120/1050/950/850/750
	Fan Motor Power Output	W	45
	Fan Motor RLA	A	0.7
	Fan Motor Capacitor	μ F	/
	Heater Power Input	W	/
	Evaporator Form	-	Aluminum Fin-copper Tube
	Evaporator Pipe Diameter	mm	Φ5
	Evaporator Row-fin Gap	mm	2-1.2
	Evaporator Coil Length (L × D × W)	mm	700 × 22.8 × 381
	Swing Motor Model	-	MP35CJ
	Swing Motor Power Output	W	2.5
	Fuse Current	A	3.15
	Sound Pressure Level	dB (A)	Cooling:50/46/44/42/40/36/32 Heating:49/46/44/41/38/34/30
	Sound Power Level	dB (A)	Cooling:60/56/54/52/50/46/42 Heating:59/56/54/51/48/44/40
	Dimension (W × H × D)	inch	37 1/8 × 13 7/64 × 9 11/16
	Package Carton Dimension (L × W × H)	inch	39 7/32 × 15 5/8 × 12 9/32
	Package Dimension (L × W × H)	inch	39 13/32 × 15 15/16 × 12 43/64
	Net Weight	lb	28.7
	Gross Weight	lb	34.2


Job Name:

Schedule Reference:


Date:

Specification are subject to change without notice.

Outline Dimension Diagram

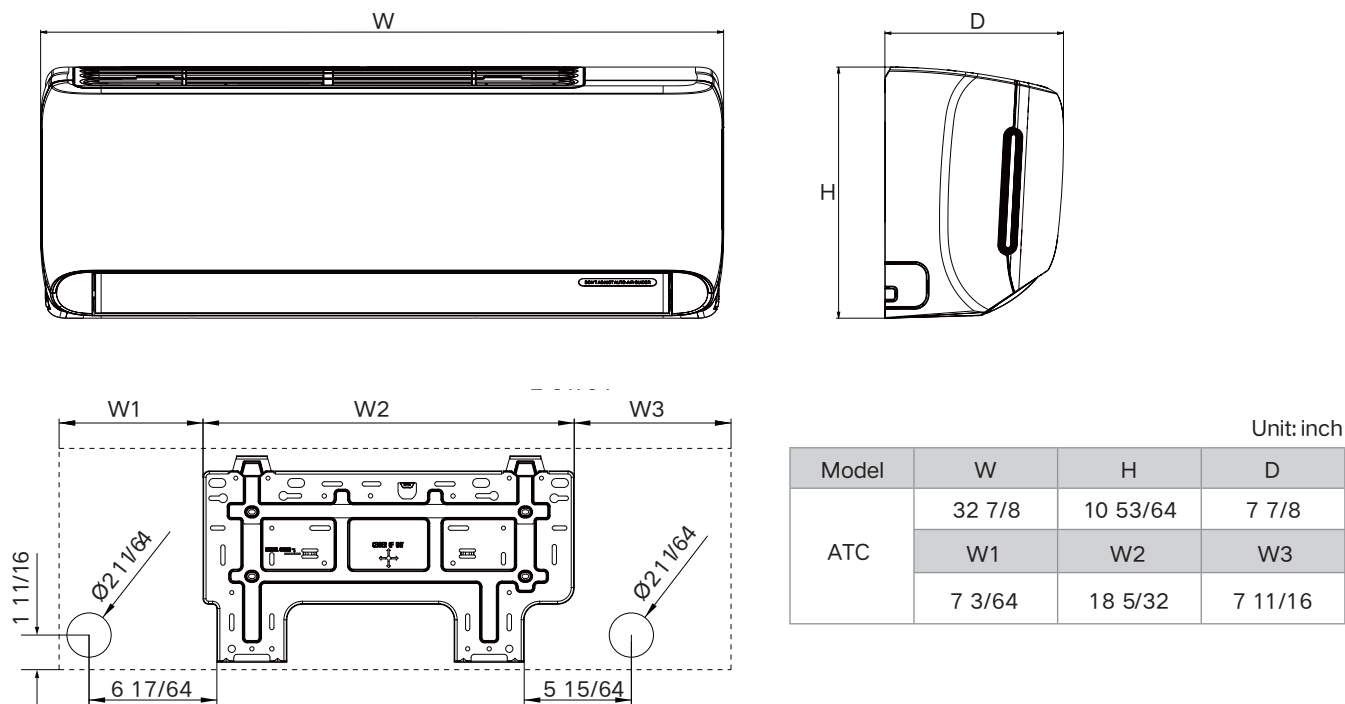

Installation Dimension Diagram

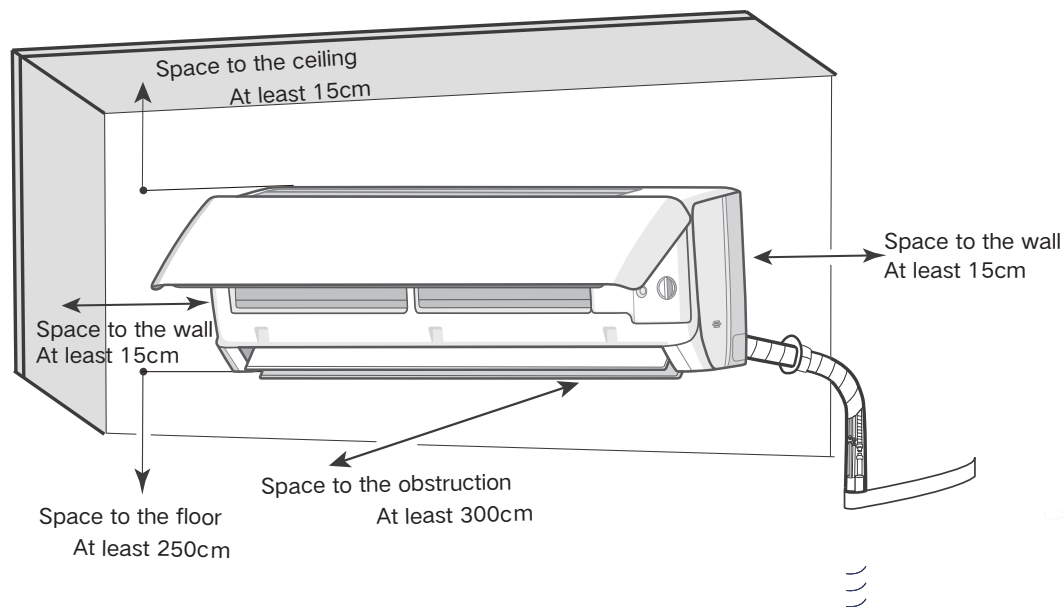



TOSOT

Installation Dimension Diagram

